


Autodesk 教育版产品制作

REV	ECRN	DATE
1	NEW PRODUCTION	20170916

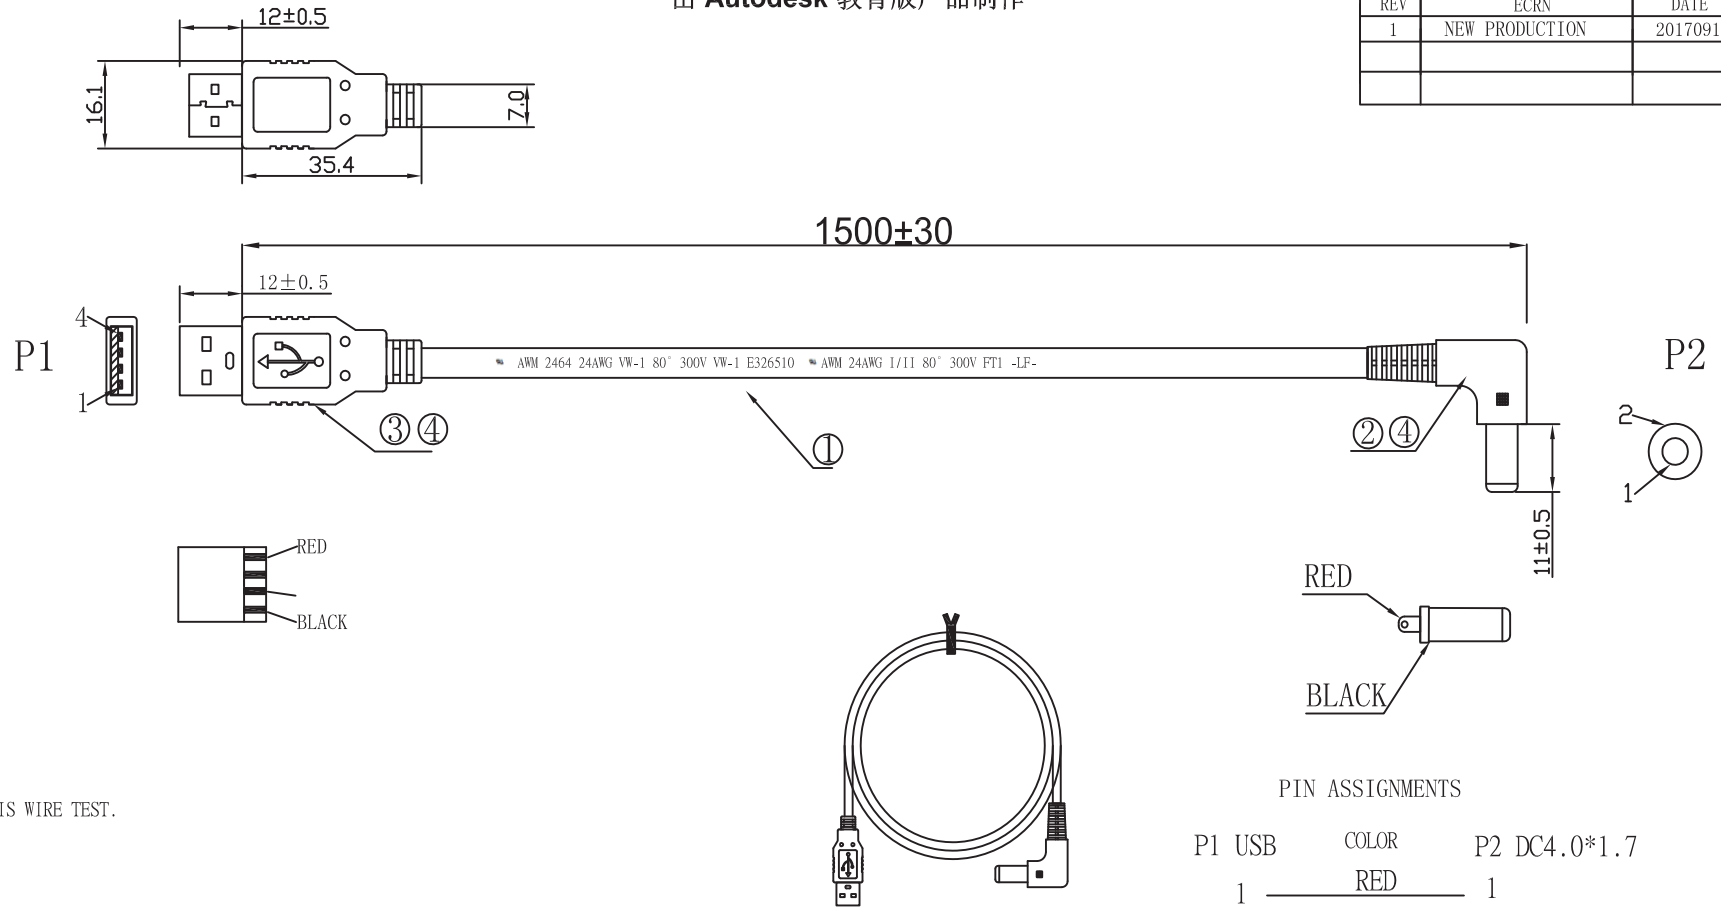

NOTES:

- 1.ELECTRICAL TEST:100%OPEN,SHORT&MIS WIRE TEST.
- 2.CONTACT RESISTANCE:94mR,
- 3.INSULATOR RESISTANCE:5M ohm.
- 4.HIGH VOLTAGE:DC 300V 0.01sec.
- 5.MUST BE ROHS COMPLIANT.

⑦	I.100150.0300R	PE BAG	100*150*0.04MM White edge chain bag	1	PCS
⑥	J.000008.0500R	TIN WIRE	TIN WIRE OD:0.8MM	2.5	G
⑤	I.000001.0400R	TIE	TIE BLACK L=80MM	1	PCS
④	C.045P01.0100R	MOLDING	PVC 45P BLACK	7.5	G
③	B.01004M.0N01R	CONNECTOR	USB A/M 4P PIN GODED PLATED SHELL NICKEL PLASTIC:WHITE	1	PCS
②	B.04055M.0N08R	CONNECTOR	DC4.0*1.7*18.5 PLUG MALE SHELL NICKEL PLASTIC:BLACK	1	PCS
①	A.009X01.0208R	CABLE	UL2464 24AWG(11/0.16TC)*2C(RED,BLACK) JACKET PVC 60P BLACK OD:3.5±0.1mm L=1500±10MM	1	PCS

NO.	PART NO	ITEM	DESCRIPTION	QTY	UNIT
-----	---------	------	-------------	-----	------

PIN ASSIGNMENTS

P1 USB	COLOR	P2 DC4.0*1.7
1	RED	1
4	BLACK	2

DELOCK® we move the world			
Title: Cable USB Power > DC 4.0 x 1.7 mm Male 90° 1.5 m			
Item no.		85544	
Barcode		4043619855445	
File No.		88203	

Date	2018 / 02 / 08
Unit	mm
Projection	
Rev	A