


# Navilock Connection Cable MD6 female serial > 5 x open wires TTL (5 V) 52 cm

## Description

The connection cable by Navilock converts the serial signals for all MD6 receivers to TTL 5 V signals. Compatible with TTL/CMOS is this interface suitable for GPIO, UART, Controller and CPU.

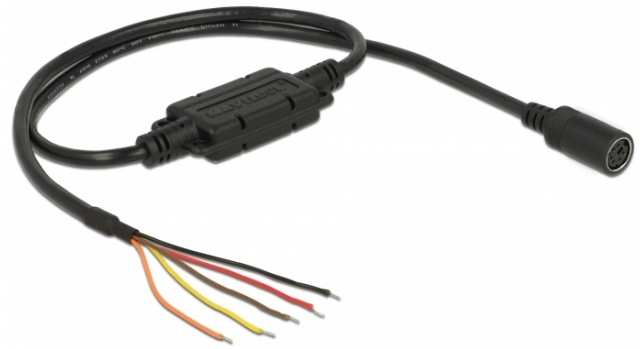

ca. 52 cm

## Specification

- Connectors:  
1 x MD6 jack >  
1 x 5 pin open wire
- Chipset: ASIX ZT3221LEEY
- Cable gauge: 28 AWG
- Voltage: 5 V
- Cable colour: black
- Cable length incl. connectors: ca. 52 cm

## System requirements

- A Navilock serial MD6 GNSS receiver

## Package content


- Connection cable for GNSS receiver
- Navilock support CD

## Item no. 62884

EAN: 4043619628841

Country of origin: Taiwan, Republic of China

Package: Poly bag



## Images



**Interface**

connector: **standard**  
1 x MD6 jack

Connector 1: **standard**  
5 x open wires

**Technical characteristics**

Chipset: **standard**  
ASIX ZT3221LEEY

Voltage: **standard**  
5 V

**Physical characteristics**

Cable colour: **standard**  
black

Cable length incl. connector: **standard**  
52 cm