



# Navilock Connection Cable M8 female serial waterproof > 5 pin pin header, pitch 2.54 mm TTL (5 V) 1.2 m

## Description

The waterproof connection cable by Navilock converts the serial signals for all M8 receivers to TTL 5 V signals. Compatible with TTL/CMOS this I/O interface is suitable for GPIO, UART, controller and CPU.

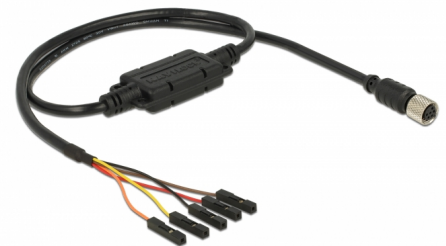

1,2 m

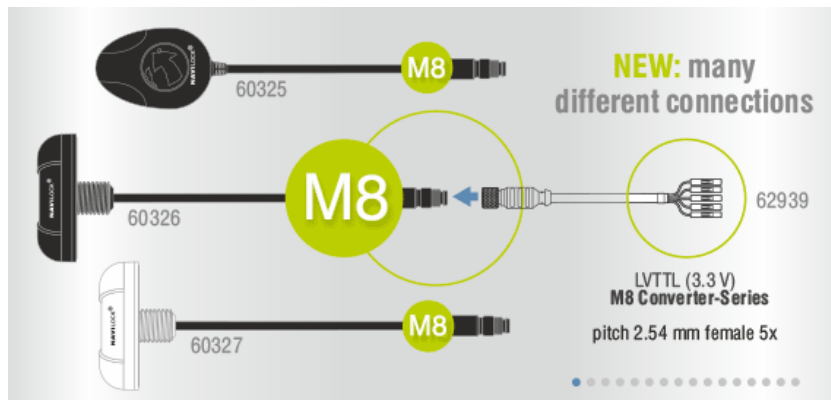

**Item no. 62891**

EAN: 4043619628919

Country of origin: Taiwan, Republic of China

Package: Zip poly bag

## Technical details

- Connectors:  
1 x M8 female >  
1 x 5 pin female pin header
- Pitch: 2.54 mm
- Chipset: ASIX ZT3221LEEY
- Data transfer: bidirectional
- Cable gauge: 28 AWG
- Voltage: 5 V
- Waterproof
- Cable colour: black
- Length incl. connectors (L): ca. 1.2 m

## System requirements


- A Navilock serial M8 GNSS receiver

## Package content

- Connection cable for M8 GNSS receiver

- Navilock support CD
- 

## Images



## General

Protection category:	waterproof
----------------------	------------

## Interface

connector:	1 x M8 female
Connector 1:	1 x 2,54 mm pin header 5 pin female

## Technical characteristics

Chipset:	ASIX ZT3221LEEY
Voltage:	5 V

## Physical characteristics

Cable colour:	black
Cable length incl. connector:	1.20 m