


# Navilock Connection Cable M8 female serial waterproof > 3.5 mm 3 pin stereo jack male 90° LVTTL (3.3 V) 1.2 m

## Description

The waterproof connection cable by Navilock converts the serial signals for all M8 receivers to LVTTL 3,3 V signals. Compatible with LVTTL/CMOS 3.3 V is this interface suitable for GPIO, UART, Controller and CPU.



ca. 1,2 m

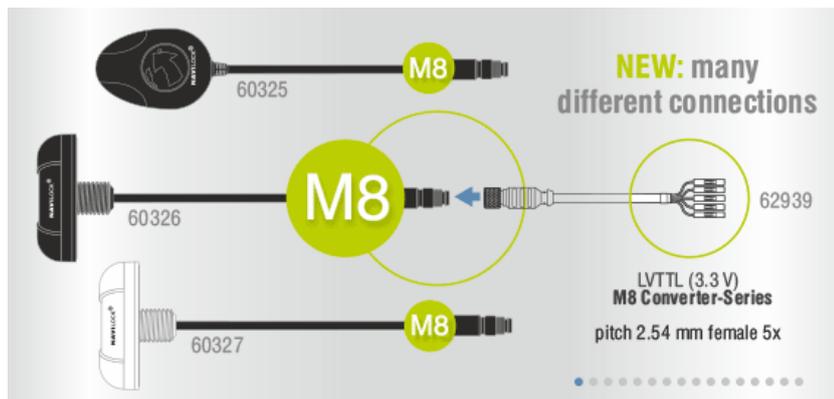

**Item no. 62936**

EAN: 4043619629367

Country of origin: Taiwan, Republic of China

Package: Zip poly bag

## Specification

- Connectors:
  - 1 x M8 female >
  - 1 x 3.5 mm 3 pin stereo jack male 90°
- Chipset: ASIX ZT3221LEEY
- Data transfer: unidirectional
- Cable gauge: 28 AWG
- Voltage: 3.3 V
- Waterproof
- Cable colour: black
- Length incl. connectors (L): ca. 1.2 m

## System requirements


- A Navilock serial M8 GNSS receiver

---

## Package content

- Connection cable for M8 GNSS receiver
  - Navilock support CD
- 

## Images



## General

Protection category:	waterproof
----------------------	------------

## Interface

connector:	1 x M8 female
Connector 1:	1 x 3.5 mm 3 pin stereo jack male

## Technical characteristics

Chipset:	ASIX ZT3221LEEY
Voltage:	3.3 V

## Physical characteristics

Cable colour:	black
Cable length incl. connector:	1.20 m