



Navilock Connection Cable M8 female serial waterproof > 5 pin pin header, pitch 2.54 mm LVTTTL (3.3 V) 1.2 m

Description

The waterproof connection cable by Navilock converts the serial signals for all M8 receivers to LVTTTL 3.3 V signals. Compatible with TTL/CMOS 3.3 V this I/O interface is suitable for GPIO, UART, controller and CPU.

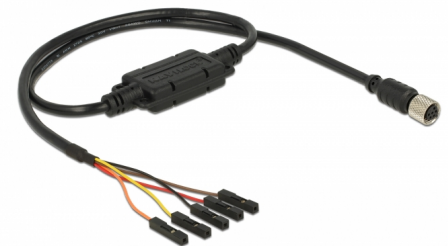

1,2 m

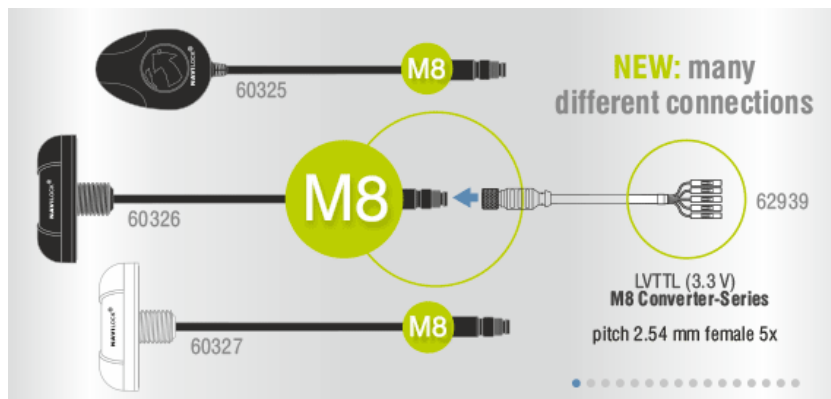

Item no. 62939

EAN: 4043619629398

Country of origin: Taiwan, Republic of China

Package: Zip poly bag

Specification

- Connectors:
 - 1 x M8 female >
 - 1 x 5 pin female pin header
- Pitch: 2.54 mm
- Chipset: ASIX ZT3221LEEY
- Data transfer: bidirectional
- Cable gauge: 28 AWG
- Voltage: 3.3 V
- Waterproof
- Cable colour: black
- Length incl. connectors (L): ca. 1.2 m


System requirements

- A Navilock serial M8 GNSS receiver

Package content

- Connection cable for M8 GNSS receiver
- Navilock support CD

Images

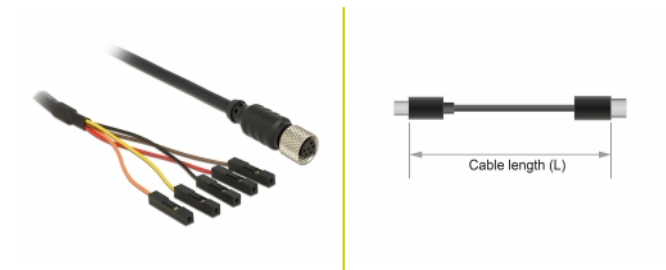

General

Protection category:	waterproof
----------------------	------------

Interface

connector:	1 x M8 female
Connector 1:	1 x 2,54 mm pin header 5 pin female

Technical characteristics

Chipset:	ASIX ZT3221LEEY
Voltage:	3.3 V

Physical characteristics

Cable colour:	black
Cable length incl. connector:	1.20 m