


Navilock 3 G+C TNC Jack GLONASS+GPS+Compass/Beidou Multi GNSS Antenna

Description

Nutzen Sie diese hoch präzise Antenne an Ihren GNSS Geräten, um GPS, GLONASS, Galileo und Compass/Beidou Signale gleichzeitig zu empfangen.

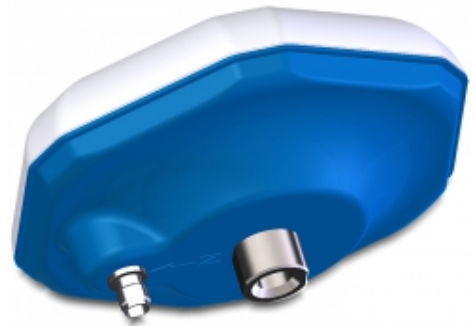

Item no. 60548

EAN: 4043619605484

Country of origin:
Germany

Package: White Box

Technical details


- External active additional antenna for GNSS receiver
- TNC jack
- Galileo: E1, E5a, E5b, E5a+b (AltBOC), E6
- GPS: L1, L2, L2c, L5
- Compass: B1, B2, B3
- GLONASS: G1, G2, G3, G5
- SBAS: WAAS, EGNOS, GAGAN, MSAS, SDCM
- VSWR: >2:1
- Polarisation: RHCP
- Impedance: 50 Ohm
- LNA gain: 29 dB +- 1@L2
27 dB +- 1@L1
- Power supply: 3,3 ~ 20 V
- Current: 50 mA
- Operating temperature: -45°C ~ 75°C
- Dimension: (H x B) 72 x 172 mm
- Mount: 5/8" - 11 UNC-2B
23 mm combination wrench
- Wight: 380 g
- Protection class: IP69K

MIL-STD-810

Package content

- GNSS antenna

Images

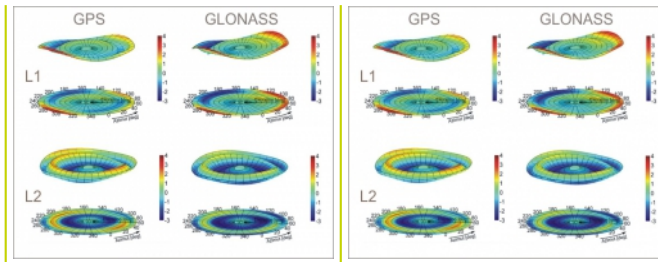

General

Protection class:	IP69K
-------------------	-------

Interface

Connector 1:	TNC jack
--------------	----------

Technical characteristics

Impedance:	50 Ω
Operating temperature:	-45 °C ~ 75 °C
Polarisation:	RHCP
Current consumption:	50 mA
VSWR:	2.0

Physical characteristics

Weight:	380 g
Diameter:	172 mm
Length:	72 mm

Manufacturer information

Street	Beeskowdamm 13/15
Postal code	14167
City	Berlin
Country	Deutschland
E-Mail	info@navilock.de
Website	www.navilock.de